



4 x 400W
METAL HALIDE REPLACEMENTS

Lighting Tower LED Upgrade Kit


200W High Output Disc - 140 Lm/W

A high output LED flood light kit, ideal replacement
for 4 x 400W metal halide lighting towers


- Integrated ballast / driver
- 5700K cool white colour temperature
- Average life of 50,000 hours
- Tough non-corrosive aluminium die-cast housing
- Rated IP65 - ideal for outdoor use
- Adjustable tilt and turn brackets
- 1.5 metre cable with in-line connector



PRODUCT CODE	VOLTAGE	WATTAGE	LUMENS	BEAM ANGLE	WEIGHT
200WUPGRADEKIT	110-240V 50/60Hz	800W	112,000	60°	35.8Kg
200WHEAD	110-240V 50/60Hz	200W	28,000	60°	8.95Kg

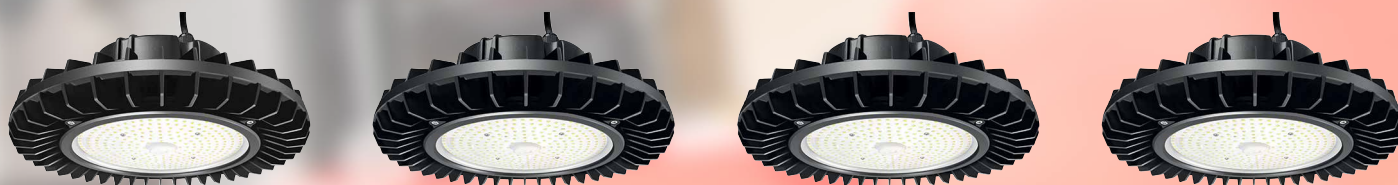

Upgrade kit includes 4 x light heads

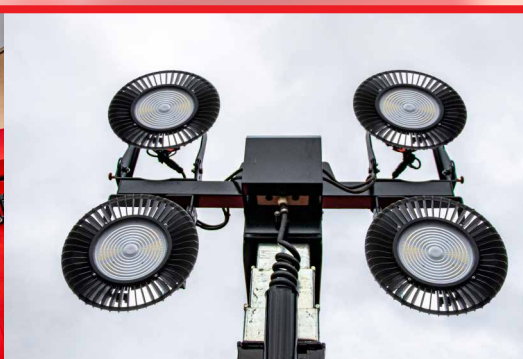

SINGLE HEAD SPECIFICATIONS

ELECTRICAL SPECIFICATIONS



LED Power:	200W
Operating Voltage:	110-240V AC
Operating Temperature:	-20°C ~ 50°C
Operating Humidity:	10% ~ 90%
Power Factor (PF):	>0.95
Power Supply Efficiency:	>90%

PHOTOMETRIC SPECIFICATIONS

Initial Luminous Flux:	28,000lm
Colour Rendering Index (CRI):	Ra > 80
Colour Temperature:	5700K

MECHANICAL SPECIFICATIONS

IP & IK Rating	IP65 & IK10
Lifetime	50,000 hours - L70, @25°C
Heat Radiator	Anodised Aluminium
Lens	PC (Polycarbonate)
Fixture Dimension	ø380 x 437mm

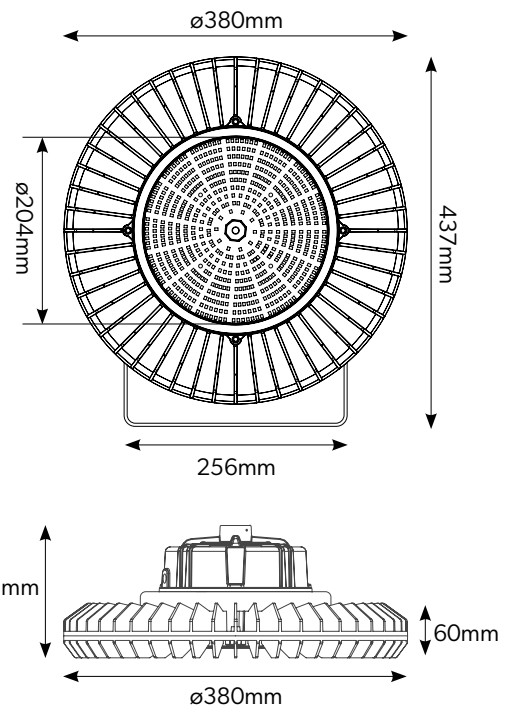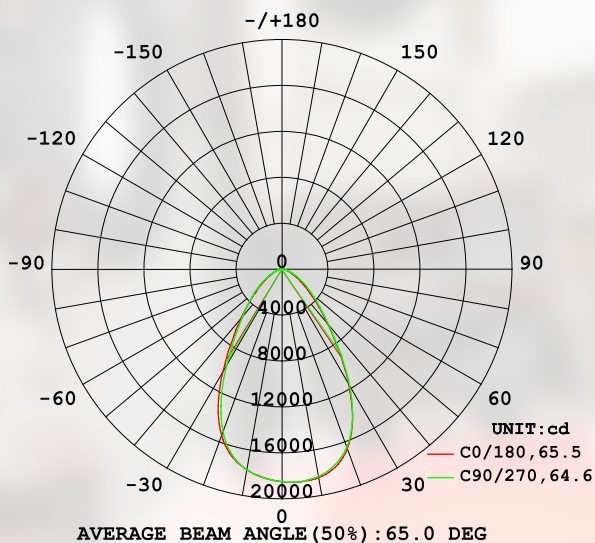

200W Light Output

Over 3000m² area coverage
at 20 lux average

